




1. General Instructions


- ✧ A professional user friendly controller equipped with 4 channels.
- ✧ Equipped with 9 different hold-color buttons for instant colors.
- ✧ Comes with 32 spectrum mix colors, color fade, and 12 different chase patterns. Providing the richest color burst for the show.
- ✧ Speed and dimmer adjustable for both color fade and color chase.
- ✧ Sound activated function is available.
- ✧ Full on and Blackout functions.
- ✧ Power supply : DC 9V 300mA Min.
- ✧ Size: 210X140X46 mm
- ✧ Weight : 0.93kgs

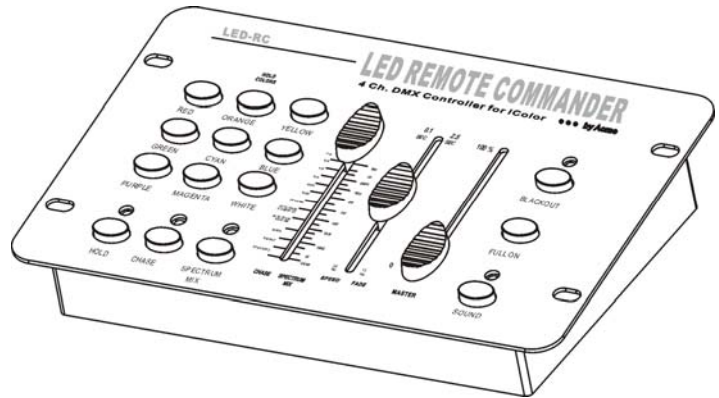

Function Instructions :

Blackout	Blackout the fixture
Full On	All lighting effect at once
Sound	Use to receive audio signal for sound activated
Hold	Press the button for select color on Red / Orange / Yellow / Green / Cyan / Blue / Purple / Magenta / White
Chase	Press the button for select 12 chase patterns form Chase slider
Spectrum Mix	Press the button for select 32 spectrum mix colors form Spectrum Mix slider
Chase Slider	To choose chase patterns on Standard chase / Bright chase / Mood chase / spectrum random chase / Spectrum sequence chase / Dynamic chase / Red-Green+ Blue / Green-Red + Blue / Blue-Red / Yellow-Blue / Red-Green / Yellow-Green
Spectrum Mix Slider	Use to control 32 spectrum mix colors
Speed Slider	Use to adjust chase speed with in the range of 0.1 to 2.5 seconds
Fade Time Slider	Use to adjust fade time. Fade time is amount of one color to fade in or fade out
Master Slider	Use to dimmer / shutter the fixture

Rear view:

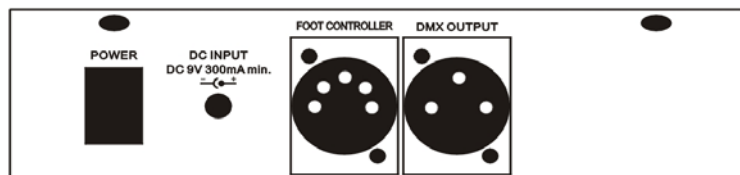


- Power Switch Turn On/Off the power.
- DC Input DC 9V, 300mA min.
- DMX Output Set DMX value to the fixture.
- Foot controller Use to Connect the Foot controller (CA-32F)

2. How to control the unit


LED-RC F is a remote professional controller designed to control LED PAR or to use with LED-PC300, LED-PC100 as well as LED-CC. It also features a 5-pin Male XLR DMX connector specially designed to be linked with data output of CA-32F (foot controller), then fixtures can be controlled for Blackout, Hold Color and Chase functions by foot. Please kindly refer to the following installation drawings for LED PAR, COLOR BALL (CB-12 only), COLOR TUBE respectively.

During operation, fixtures can only be controlled via CA-32F by foot or switch to LED-RC F controlled by hand . CA-32F and LED-RC F can never be operated simultaneously.

Color Par Installation:

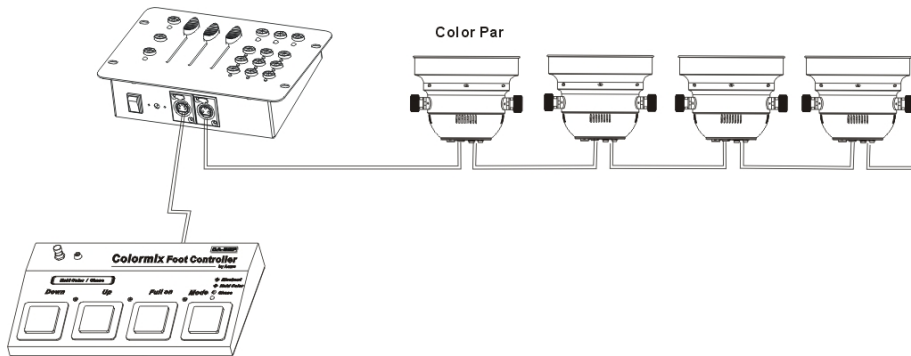

Color Ball Installation:

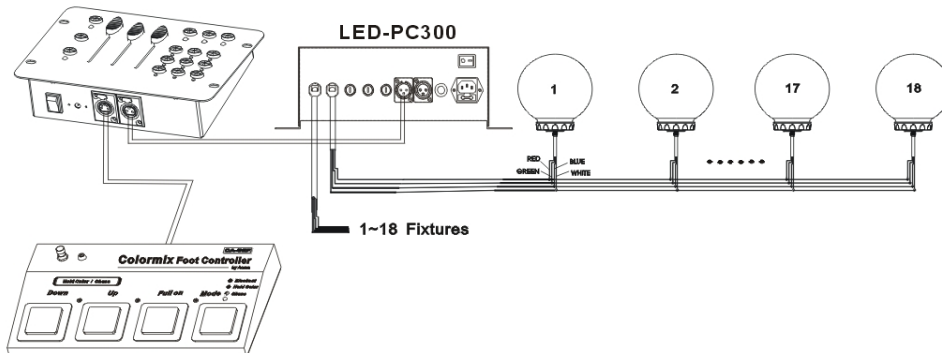

Color Tube Installation:

