


EQUINOX

Curve MAX

Mirror Ball Hanging Bracket

User Manual

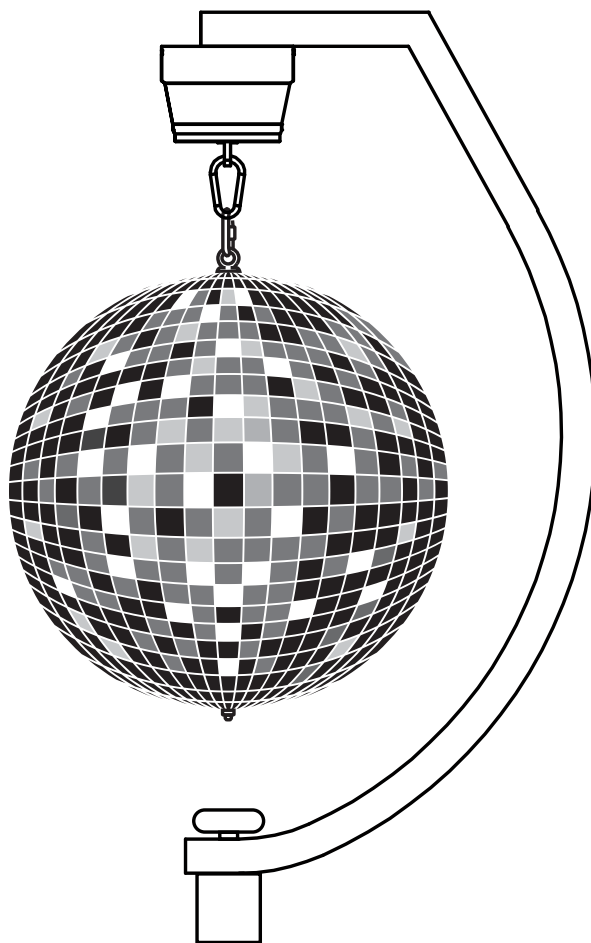

Order code: MIRR15

WARNING

FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY BEFORE YOUR INITIAL START-UP!

- Before your initial start-up, please make sure that there is no damage caused during transportation.
- Should there be any damage, consult your dealer and do not use the equipment.
- To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.
- Please note that damages caused by user modifications to this equipment are not subject to warranty.



IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorised modification to the equipment.

- Never let the power cable come into contact with other cables. Handle the power cable and all mains voltage connections with particular caution!
- Never remove warning or informative labels from the unit.
- Do not open the equipment and do not modify the unit.
- Do not connect this equipment to a dimmer pack.
- Do not switch the equipment on and off in short intervals, as this will reduce the system's life.
- Only use the equipment indoors.
- Do not expose to flammable sources, liquids or gases.
- Always disconnect the power from the mains when equipment is not in use or before cleaning! Only handle the power-cable by the plug. Never pull out the plug by pulling the power-cable.
- Make sure that the available mains supply voltage is 240V AC, 50Hz.
- Make sure that the power cable is never crimped or damaged. Check the equipment and the power cable periodically.
- If the equipment is dropped or damaged, disconnect the mains power supply immediately and have a qualified engineer inspect the equipment before operating again.
- If the equipment has been exposed to drastic temperature fluctuation (e.g. after transportation), do not connect power or switch it on immediately. The arising condensation might damage the equipment. Leave the equipment switched off until it has reached room temperature.
- If your product fails to function correctly, stop use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Prolight dealer for service.
- Only use fuses of same type and rating.
- Repairs, servicing and power connection must only be carried out by a qualified technician. THIS UNIT CONTAINS NO USER SERVICEABLE PARTS.
- This fixture is for professional use only - it is not designed for or suitable for household use. The product must be installed by a qualified technician in accordance with local territory regulations. The safety of the installation is the responsibility of the installer. The fixture presents risks of severe injury or death due to fire hazards, electric shock and falls.
- **WARRANTY:** One year from date of purchase.

OPERATING DETERMINATIONS

If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void. Incorrect operation may lead to danger e.g: short-circuit, burns and electric shocks etc.

Do not endanger your own safety and the safety of others!

Incorrect installation or use can cause serious damage to people and/or property.

This unit is a mirror ball motor and hanging bracket for rotating mirror balls. The maximum load of the installation eyelet must never be exceeded. The safety eyelet must never be used for loads.

When choosing the installation location, please make sure that the unit is not exposed to extreme heat, moisture or dust. There should not be any cables lying around. You endanger your own and the safety of others!

This unit must never be operated or stockpiled in surroundings where water, rain, moisture or fog may harm it. Moisture or very high humidity can reduce the electrical insulation and lead to fatal electrical shocks.

The ambient temperature must always be between -5 °C and +45 °C. Keep away from direct insulation (particularly in cars) and heaters. The relative humidity must not exceed 50 % with an ambient temperature of 45 °C. Never use the unit during thunderstorms. Over voltage can destroy the unit. Always disconnect the unit during thunderstorms.

Make sure that the area below the installation place is blocked when rigging, derigging or servicing the unit.

Curve MAX Mirror Ball Hanging Bracket

Add elegance and class to your event with the Equinox Curve MAX. This stylish, all metal bracket is suitable for mirror balls 30-50cm in diameter and is supplied with a 1 RPM rotator and 2m captive power connection.


The Curve MAX can be fitted to a 35mm stand using the supplied stand adaptor or can be fixed to a truss podium or any flat surface.

- White powder coated finish
- 2m captive power connection
- 35mm stand adaptor included
- Ideal for mounting on stands, DJ booths and podiums
- Complies with the safety norm EN 292

Specifications	
Power supply	240V, 50Hz
Power consumption	5W
Max. load	10kg
Max. diameter of mirror ball	30-50cm
Rotation speed	1 RPM
Dimensions	795 x 362 x 115mm
Weight	2.1kg
Order code	MIRR15

In the box:
1 x rotator & hanging bracket & 1 x user manual

- 01 - Mirror ball motor
- 02 - Motor axle
- 03 - Mirror ball attachment
- 04 - Mirror ball (not included)
- 05 - Mirror ball hanging bracket
- 06 - 35mm stand adaptor
- 07 - Stand adaptor tightening knob
- 08 - Stand (not included)

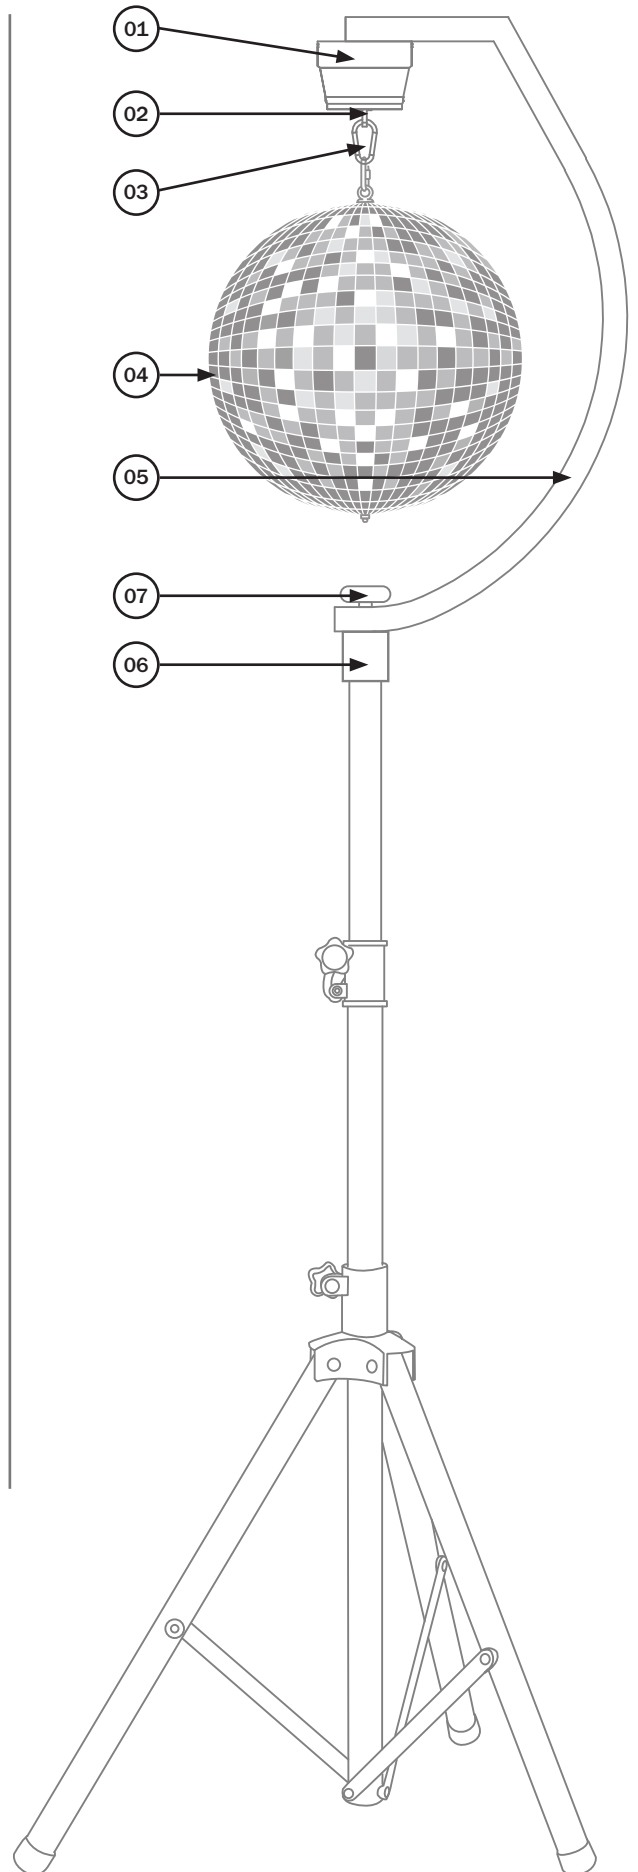



DANGER TO LIFE!

PLEASE CONSIDER THE EN 60598-2-17 AND THE RESPECTIVE NATIONAL REGULATIONS DURING THE INSTALLATION. THE INSTALLATION MUST ONLY BE CARRIED OUT BY A COMPETENT AND QUALIFIED INSTALLER!

The motor must be installed in an absolutely horizontal position in a vibration-free, oscillation-free and fire-resistant location

If the motor and the mirror ball are to be operated above persons, additional risks arise. A hazard analysis based on the location and application must be performed. Both the motor and mirror ball must meet the safety regulations regarding safety and operation.

The installation point of the mirror ball has to be built and constructed in a way that it can hold 10 times the weight of the mirror ball for one hour without any deformation.

The unit must always be secured with a secondary safety attachment. This secondary attachment must be constructed in a way that no part of the unit can fall if the main attachment fails.

When rigging, derigging or servicing the unit, no persons should be in the area below/above the installation, or in other areas which may be a hazard.

The operator has to make sure that safety relating and machine technical installations are approved by a competent, qualified expert before starting operation for the first time and before starting operation if changes have been made to the installation.



***Correct Disposal of this Product
(Waste Electrical & Electronic Equipment)***



(Applicable in the European Union and other European countries with separate collection systems)

This marking shown on the product or its literature, indicates that it should not be disposed of with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.