





LIGHT BAR

User Instruction

WARNING!!!

This product is intended for indoor use only.
 This apparatus must be earthed.
 To prevent fire or shock hazard, do not expose this product under a high temperature or humid area.

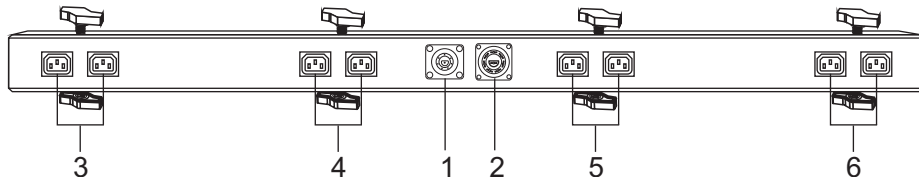

Output Connection:

PIN ARRANGEMENT			
1	⏏ E	5	CH-4
2	CH-1	6	N
3	CH-2	7	N
4	CH-3	8	N

1. Channel 1-4 Input: 6A/CH. Max., Male Bulgin sockets.
2. Channel 1-4 Output: 6A/CH. Max., Female Bulgin sockets.
3. Channel 1 Output: 2x IEC sockets, 6A/CH. Max.
4. Channel 2 Output: 2x IEC sockets, 6A/CH. Max.
5. Channel 3 Output: 2x IEC sockets, 6A/CH. Max.
6. Channel 4 Output: 2x IEC sockets, 6A/CH. Max.

SPECIFICATIONS

Power Input AC 230V~50/60Hz
Loading 6A/CH. Max., Total 16A
Output Connectors 8xIEC sockets & 1x Female Bulgin socket
Input Connector Male Bulgin socket x1(PC)
Dimensions 1225x60x60mm
Weight 3.1Kg



24-004-1331
 Rev 1.1

www.prolight.co.uk
 sales@prolight.co.uk





LIGHT BAR

User Instruction

WARNING!!!

This product is intended for indoor use only.
 This apparatus must be earthed.
 To prevent fire or shock hazard, do not expose this product under a high temperature or humid area.

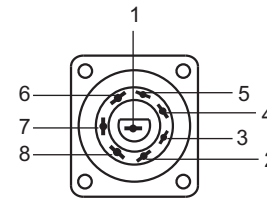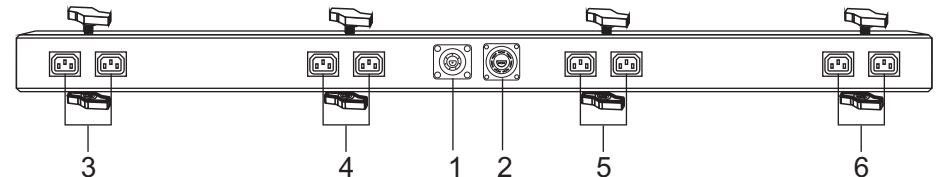

Output Connection:

PIN ARRANGEMENT			
1	⏏ E	5	CH-4
2	CH-1	6	N
3	CH-2	7	N
4	CH-3	8	N

1. Channel 1-4 Input: 6A/CH. Max., Male Bulgin sockets.
2. Channel 1-4 Output: 6A/CH. Max., Female Bulgin sockets.
3. Channel 1 Output: 2x IEC sockets, 6A/CH. Max.
4. Channel 2 Output: 2x IEC sockets, 6A/CH. Max.
5. Channel 3 Output: 2x IEC sockets, 6A/CH. Max.
6. Channel 4 Output: 2x IEC sockets, 6A/CH. Max.

SPECIFICATIONS

Power Input AC 230V~50/60Hz
Loading 6A/CH. Max., Total 16A
Output Connectors 8xIEC sockets & 1x Female Bulgin socket
Input Connector Male Bulgin socket x1(PC)
Dimensions 1225x60x60mm
Weight 3.1Kg



24-004-1331
 Rev 1.1

www.prolight.co.uk
 sales@prolight.co.uk