

EQUINOX

Giga Bar System

User Manual



Order code: EQLED65

WARNING

FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY BEFORE YOUR INITIAL START-UP!

- Before your initial start-up, please make sure that there is no damage caused during transportation.
- Should there be any damage, consult your dealer and do not use the equipment.
- To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.
- Please note that damages caused by user modifications to this equipment are not subject to warranty.



IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorised modification to the equipment.

- Never let the power cable come into contact with other cables. Handle the power cable and all mains voltage connections with particular caution!
- Never remove warning or informative labels from the unit.
- Do not open the equipment and do not modify the unit.
- Do not connect this equipment to a dimmer pack.
- Do not switch the equipment on and off in short intervals, as this will reduce the system's life.
- Only use the equipment indoors.
- Do not expose to flammable sources, liquids or gases.
- Always disconnect the power from the mains when equipment is not in use or before cleaning! Only handle the power-cable by the plug. Never pull out the plug by pulling the power-cable.
- Make sure that the available mains supply voltage is between 100~240V AC, 50/60Hz.
- Make sure that the power cable is never crimped or damaged. Check the equipment and the power cable periodically.
- If the equipment is dropped or damaged, disconnect the mains power supply immediately and have a qualified engineer inspect the equipment before operating again.
- If the equipment has been exposed to drastic temperature fluctuation (e.g. after transportation), do not connect power or switch it on immediately. The arising condensation might damage the equipment. Leave the equipment switched off until it has reached room temperature.
- If your product fails to function correctly, stop use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Pro Light dealer for service.
- Only use fuses of same type and rating.
- Repairs, servicing and power connection must only be carried out by a qualified technician. THIS UNIT CONTAINS NO USER SERVICEABLE PARTS.
- This lighting fixture is for professional use only - it is not designed for or suitable for household use. The product must be installed by a qualified technician in accordance with local territory regulations. The safety of the installation is the responsibility of the installer. The fixture presents risks of severe injury or death due to fire hazards, electric shock and falls.
- Warning! Risk Group 2 LED product according to EN 62471. Do not view the light output with optical instruments or any device that may concentrate the beam.
- WARRANTY: One year from date of purchase.

OPERATING DETERMINATIONS

If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void. Incorrect operation may lead to danger e.g: short-circuit, burns and electric shocks etc.

Do not endanger your own safety and the safety of others!

Incorrect installation or use can cause serious damage to people and/or property.


Giga Bar System

This portable system of four slim LED panels creates superb colour wash effects. In just a few minutes this lightweight and portable system can be set up and ready to rock.


The multidirectional panels are independently adjustable for maximum room or stage coverage. An additional two power out sockets are fitted for switching effects and are controlled via the footswitch or IR remote.

This versatile kit and operating system creates a multitude of effects and comes complete with a height adjustable lighting stand with carry bag, footswitch controller, IR remote and heavy duty padded road bag. Supplied with four 20° lenses to tailor the beam angle to suit most applications.

- 4 x 30W tri-colour COB LEDs (RGB)
- Beam angle: 110°
- Beam angle with supplied lens: 20°
- (field angle: 28°)
- DMX channels: 3/4/5/6/7/8/12 or 17 selectable
- Sound active, built-in programs, auto and master/slave modes
- IR operation (remote included)
- 14 built-in programs
- 0-100% dimming and variable strobe
- 4 push button menu with LCD digital display
- 3-Pin XLR input/output
- 5-Pin input for included foot controller (GB1)
- PowerCON input/output
- 2 x IEC power outputs (switchable via IR remote or foot controller for effects switching)
- Height adjustable stand with carry bag
- All metal design
- Convection cooled

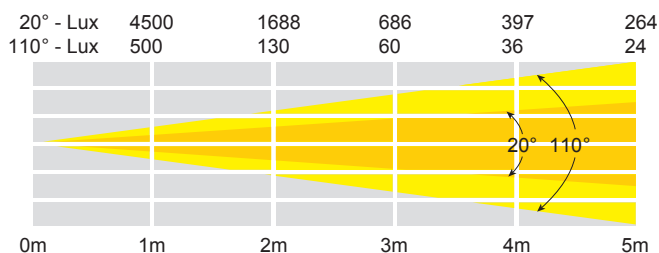

Specifications	
Power consumption	135W
Power supply	100~240V, 50/60Hz
Fuse	F2A 250V
Dimensions	320 x 1000 x 82mm (without stand)
Weight	13kg
Order code	EQLED65

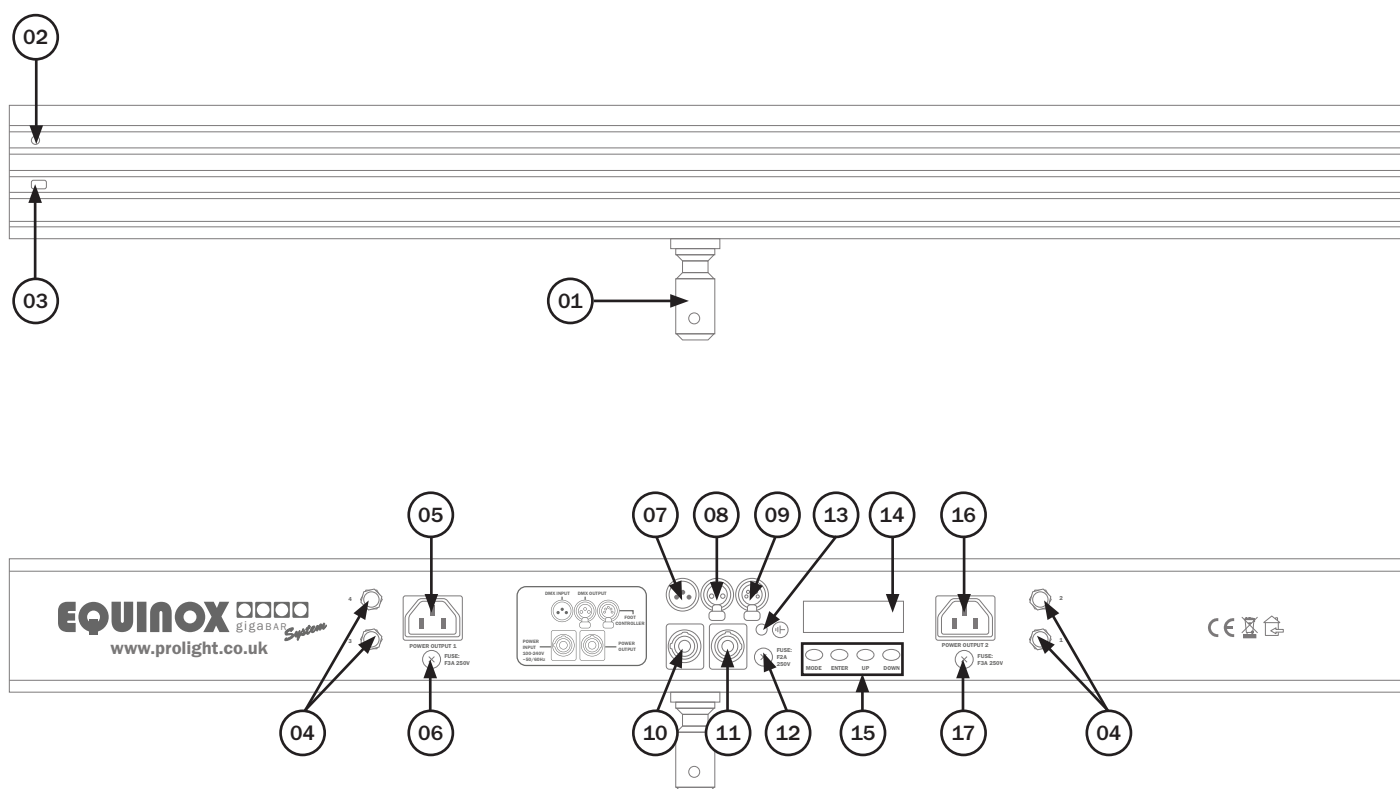

01 - 28mm spigot

02 - IR LED

03 - IR sensor

04 - Output to LED panel

05 - IEC power output 1

06 - IEC power output 1
fuse: F3A 250V

07 - 3-Pin DMX input

08 - 3-Pin DMX output

09 - 5-Pin foot
controller output

10 - PowerCON input

11 - PowerCON output

12 - Fuse: F2A 250V

13 - Earth point

14 - LCD display

15 - Function buttons

16 - IEC power output 2

17 - IEC power output 2
fuse: F3A 250V

In the box: 1 x fixture & case,
1 x stand & bag,
1 x GB1 foot controller,
1 x IR remote,
1 x power cable &
1 x user manual

DMX mode:

Operating in a DMX control mode environment gives the user the greatest flexibility when it comes to customising or creating a show. In this mode you will be able to control each individual trait of the fixture and each fixture independently.

To access the DMX mode, press the “**MODE**” button on the rear of the unit to show “**DMX MODE**” on the LCD display. Now press the “**ENTER**” button and use the “**UP**” and “**DOWN**” buttons to set the required DMX address. Press the “**ENTER**” button again and use the “**UP**” and “**DOWN**” buttons to choose the DMX channel mode required 3/4/5/6/7/8/12/17. Press the “**ENTER**” button to confirm the setting.

To exit out of any of the above options, press the “**MODE**” button.

3 channel mode:

Channel	Value	Function
CH1	000-255	Red (0-100%)
CH2	000-255	Green (0-100%)
CH3	000-255	Blue (0-100%)

4 channel mode:

Channel							
CH1 (LED Panel 1)		CH2 (LED Panel 2)		CH3 (LED Panel 3)		CH4 (LED Panel 4)	
Value	Function	Value	Function	Value	Function	Value	Function
000-036	R	000-036	R	000-036	R	000-036	R
037-073	G	037-073	G	037-073	G	037-073	G
074-110	B	074-110	B	074-110	B	074-110	B
111-147	RG	111-147	RG	111-147	RG	111-147	RG
148-184	RB	148-184	RB	148-184	RB	148-184	RB
185-221	GB	185-221	GB	185-221	GB	185-221	GB
222-255	RGB	222-255	RGB	222-255	RGB	222-255	RGB

5 channel mode:

Channel	Value	Function
CH1	000-255	Red (0-100%)
CH2	000-255	Green (0-100%)
CH3	000-255	Blue (0-100%)
CH4	000-127	Power output 1 OFF
	128-255	Power output 1 ON
CH5	000-127	Power output 2 OFF
	128-255	Power output 2 ON

6 channel mode:

Channel	Value	Function
CH1	000-255	Red (0-100%) (LED Panel 1 & 2)
CH2	000-255	Green (0-100%) (LED Panel 1 & 2)
CH3	000-255	Blue (0-100%) (LED Panel 1 & 2)
CH4	000-255	Red (0-100%) (LED Panel 3 & 4)
CH5	000-255	Green (0-100%) (LED Panel 3 & 4)
CH6	000-255	Blue (0-100%) (LED Panel 3 & 4)

7 channel mode:

Channel	Value	Function
CH1	000-255	Red (0-100%)
CH2	000-255	Green (0-100%)
CH3	000-255	Blue (0-100%)
CH4	000-255	Master dimmer (0-100%)
CH5	000	No function
	001-005	Sound sensitivity (low-high)

Channel	Value	Function
CH5	006-010	No function
	011-255	Strobe (slow-fast)
CH6	000-127	Power output 1 OFF
	128-255	Power output 1 ON
CH7	000-127	Power output 2 OFF
	128-255	Power output 2 ON

8 channel mode:

Channel	Value	Function
CH1	000-015	No function
	016-023	R
	024-031	G
	032-039	B
	040-047	RG
	048-055	GB
	056-063	RB
	064-071	RGB
	072-079	Colour 1
	080-087	Colour 2
	088-095	Colour 3
	096-103	Colour 4
	104-111	Colour 5
	112-119	Colour 6
	120-127	Colour 7
	128-135	Colour 8
	136-143	Dream
	144-151	Meteor
	152-159	Fade
	160-167	Change
	168-175	Flow 1
	176-183	Flow 2
	184-191	Flow 3
	192-199	Flow 4
	200-207	Flow 5
	208-215	Flow 6
	216-223	Flow 7
	224-231	Flow 8
	232-239	Flow 9
	240-255	Sound active

Channel	Value	Function
CH2	000-255	Master dimmer (0-100%) (when CH1 is 000-135)
	000-255	Speed (slow-fast) (when CH1 is 136-239)
	000-255	Sensitivity (low-high) (when CH1 is 240-255)
CH3	000-255	Flash (slow-fast)
CH4	000-015	Red (0-100%)
	016-223	No function
	224-239	8 colour select
	240-255	No function
CH5	000-015	Green (0-100%)
	016-223	No function
	224-239	8 colour select
	240-255	No function
CH6	000-015	Blue (0-100%)
	016-255	No function
CH7	000-127	Power output 1 OFF
	128-255	Power output 1 ON
CH8	000-127	Power output 2 OFF
	128-255	Power output 2 ON

12 channel mode:

CH1	CH2	CH3	CH4	CH5	CH6
R1 (0-255)	G1 (0-255)	B1 (0-255)	R2 (0-255)	G2 (0-255)	B2 (0-255)

CH7	CH8	CH9	CH10	CH11	CH12
R3 (0-255)	G3 (0-255)	B3 (0-255)	R4 (0-255)	G4 (0-255)	B4 (0-255)

17 channel mode:

Channel	Value	Function
CH1	000-015	No function
	016-023	R
	024-031	G
	032-039	B
	040-047	RG
	048-055	GB
	056-063	RB
	064-071	RGB
	072-079	Colour 1
	080-087	Colour 2
	088-095	Colour 3
	096-103	Colour 4
	104-111	Colour 5
	112-119	Colour 6
	120-127	Colour 7
	128-135	Colour 8
	136-143	Dream
	144-151	Meteor
	152-159	Fade
	160-167	Change
	168-175	Flow 1
	176-183	Flow 2
	184-191	Flow 3
	192-199	Flow 4
	200-207	Flow 5
	208-215	Flow 6
	216-223	Flow 7
	224-231	Flow 8
	232-239	Flow 9
	240-255	Sound active
CH2	000-255	Master dimmer (0-100%) (when CH1 is 000-135)
	000-255	Speed (slow-fast) (when CH1 is 136-239)
	000-255	Sensitivity (low-high) (when CH1 is 240-255)

Channel	Value	Function
CH3	000-255	Flash (slow-fast)
CH4	000-015	Red LED Panel 1 (0-100%)
	016-223	No function
	224-239	8 colour select
	240-255	No function
CH5	000-015	Green LED Panel 1 (0-100%)
	016-223	No function
	224-239	8 colour select
	240-255	No function
CH6	000-015	Blue LED Panel 1 (0-100%)
	016-255	No function
CH7	000-015	Red LED Panel 2 (0-100%)
	016-255	No function
CH8	000-015	Green LED Panel 2 (0-100%)
	016-255	No function
CH9	000-015	Blue LED Panel 2 (0-100%)
	016-255	No function
CH10	000-015	Red LED Panel 3 (0-100%)
	016-255	No function
CH11	000-015	Green LED Panel 3 (0-100%)
	016-255	No function
CH12	000-015	Blue LED Panel 3 (0-100%)
	016-255	No function
CH13	000-015	Red LED Panel 4 (0-100%)
	016-255	No function
CH14	000-015	Green LED Panel 4 (0-100%)
	016-255	No function
CH15	000-015	Blue LED Panel 4 (0-100%)
	016-255	No function
CH16	000-127	Power output 1 OFF
	128-255	Power output 1 ON
CH17	000-127	Power output 2 OFF
	128-255	Power output 2 ON

Sound active mode:

To select the sound active mode, press the **"MODE"** button to show **"SOUND MODE"** on the LCD display. Now press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to adjust the sound sensitivity level (SENS00-31) and press the **"ENTER"** button again to adjust the frequency level (FQN01-99). Press the **"ENTER"** button to confirm your setting.

To exit out of any of the above options, press the **"MODE"** button.

Built-in programs:

To access the built-in program, press the **"MODE"** button to show **"01.STATIC"** on the LCD display.

Now press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to choose one of the 14 built-in programs (01-14) (see table overleaf).

To choose one of the seven colours in the **"STATIC"** mode, press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to choose one of the following 15 colours.

To adjust the speed level in the remaining 13 built-in programmes, press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to set the desired speed level (00-99). To adjust the flash speed press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to set the desired flash speed level (00-99). Press the **"ENTER"** button to confirm your setting.

To exit out of any of the above options, press the **"MODE"** button.

Auto mode:

To select the Auto run mode, press the **"MODE"** button to show **"AUTO RUN"** on the LCD display.

Now press the **"ENTER"** button to adjust the frequency level (FQN01-99).

Press the **"ENTER"** button to confirm your setting.

The unit will now run all 15 built-in programmes one after another.

To exit out of any of the above options, press the **"MODE"** button.

Slave mode:

To select slave mode, first link the units together via 3-Pin XLR cable(s), press the **"MODE"** button to show **"SLAVE MODE"** on all of the slave units. Now the slave units will follow in conjunction with the master unit. Press the **"ENTER"** button to confirm your setting.

To exit out of any of the above options, press the **"MODE"** button.

IEC power output on/off mode:

To turn the IEC power output 1 on or off, press the **"MODE"** button to show **"LIGHT 1"** on the LCD display. Now press the **"ENTER"** button to turn the IEC power output 1 on or off. To turn the IEC power output 2 on or off, press the **"MODE"** button to show **"LIGHT 2"** on the LCD display. Now press the **"ENTER"** button to turn the IEC power output 2 on or off.

To exit out of any of the above options, press the **"MODE"** button.

NOTE: If the Giga bar is used on continental 110V mains supply the voltage output will also be 110V.

NOTE: If the Giga bar is being used in conjunction with the GB-1 foot controller any number of Giga bars can be controlled via the foot controller by setting all bar systems into **"SLAVE"** mode.

NOTE: The frequency level (FQN01-99) adjusts how many times the program repeats before moving to the next program.

Built-in programs:

Value	Function
Static colour CL: RGB Flash: 00-99	Red, Green, Blue, Yellow, Cyan, Purple, White Flash speed adjustable
Dream Speed: 00-99 Flash 00-99	7 colour dream Speed & flash adjustable
Meteor Speed: 00-99 Flash 00-99	7 colour flow Speed & flash adjustable
Fade Speed: 00-99 Flash 00-99	7 colour fade Speed & flash adjustable
Change Speed: 00-99 Flash 00-99	7 colour change Speed & flash adjustable
Flow 1 Speed: 00-99 Flash 00-99	7 colour chase Speed & flash adjustable
Flow 2 Speed: 00-99 Flash 00-99	7 colour fade Speed & flash adjustable
Flow 3 Speed: 00-99 Flash 00-99	7 colour fade Speed & flash adjustable
Flow 4 Speed: 00-99 Flash 00-99	7 colour fade Speed & flash adjustable
Flow 5 Speed: 00-99 Flash 00-99	7 colour fade Speed & flash adjustable
Flow 6 Speed: 00-99 Flash 00-99	7 colour fade Speed & flash adjustable
Flow 7 Speed: 00-99 Flash 00-99	7 colour fade Speed & flash adjustable
Flow 8 Speed: 00-99 Flash 00-99 C1: RGB C2: RGB	7 colour fade Speed & flash adjustable
Flow 9 Speed: 00-99 Flash 00-99 C1: RGB C2: RGB	7 colour fade Speed & flash adjustable

Setting dimmer curves:

To set the dimmer curves, press the **"MODE"** button to show **"DIM CURVE"** on the LCD display. Now press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to select LED or halogen. Press the **"ENTER"** button to confirm your setting. To exit out of any of the above options, press the **"MODE"** button.

Setting static colours for each LED panel:

To set the static colour for each LED panel, press the **"MODE"** button to show **"DIMMER"** on the LCD display. Now press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to select the LED panel from 01-04. Now press the **"ENTER"** button to set the brightness of the selected LED panel. Using the **"UP"** and **"DOWN"** buttons set the LED panel to the desired brightness (R: 0-99, G: 0-99, B: 0-99). Press the **"ENTER"** button to confirm your setting. To exit out of any of the above options, press the **"MODE"** button.

Setting the master dimmer:

To set the master dimmer, press the **"MODE"** button to show **"MASTER DIMMER"** on the LCD display. Now press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to set the master dimmer from 0-99. This will effect all the modes except DMX and I.R remote. Press the **"ENTER"** button to confirm your setting. To exit out of any of the above options, press the **"MODE"** button.

Setting flow invert:

To set the flow invert, press the **"MODE"** button to show **"FLOW INVERT"** on the LCD display. Now press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to set the flow invert to on or off. Press the **"ENTER"** button to confirm your setting. To exit out of any of the above options, press the **"MODE"** button.

Setting the IR remote:


To set the IR remote, press the **"MODE"** button to show **"IR ACTIVE"** on the LCD display. Now press the **"ENTER"** button and use the **"UP"** and **"DOWN"** buttons to set the I.R remote to on or off. Press the **"ENTER"** button to confirm your setting. To exit out of any of the above options, press the **"MODE"** button.


NOTE: When in IR mode, all other control options will be overridden.

IR remote functions:

"BL" button: Use this button to turn the unit on and off.
"SP" button: Use this button to increase or decrease the speed of the program
 (Press 1 for slow, 2 for medium, 3 for fast and 4 for off)
"⚙" button: Use this button to increase or decrease the brightness of the LEDs (Press 1 for 50%, 2 for 75%, 3 for 100% and 4 for off)
"FL" button: Use this button to add strobe to any of the shows.
 (Press 1 for slow, 2 for medium, 3 for fast and 4 for off)
"RGBW" buttons: Use these buttons to increase or decrease the brightness of each individual colour.
Note: "W" will adjust R,G and B LEDs.
 (Press 1 for 50%, 2 for 75%, 3 for 100% and 4 for off)
"PR" buttons: Use these buttons to select one the built-in colour change programs.
"D" buttons: Use these buttons to select one the built-in colour fade programs.
"SA" buttons: Use the buttons to select one of the sound active programs.
"ON1/OFF1" button: Use this button to power up and power down the IEC power output 1.
"ON2/OFF2" button: Use this button to power up and power down the IEC power output 2.

Note: When multiple fixtures are being linked, the slave units must be set into slave mode via the LCD display on the Giga Bar(s).

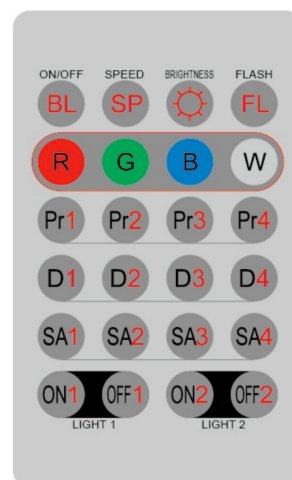

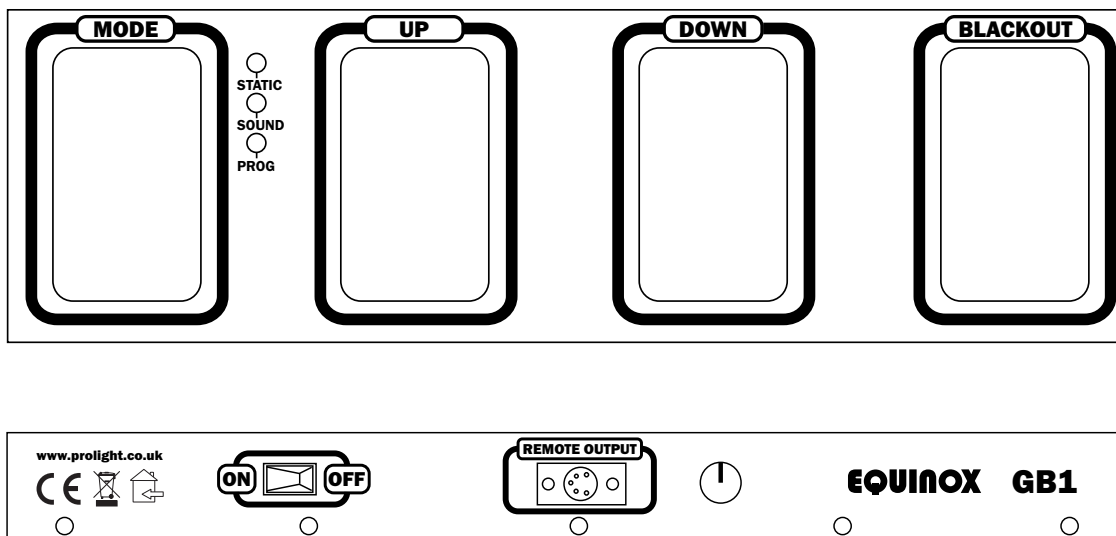

Operations:

This foot controller is made specially for the Giga Bar system. Many of the built-in programmes can be accessed via the 4 foot switches. To control the Giga Bar using the foot switch controller, you must first set the bar systems into “**SLAVE**” mode.

Static colour selection mode:

To activate this mode, press the “**MODE**” foot switch to “**STATIC**”, the red LED indicator is lit, now use the “**UP**” and “**DOWN**” foot switches to select the desired colour. To blackout the unit, press the “**BLACKOUT**” foot switch and press it again to return it to the previous setting.

Sound active mode:

To activate this mode, press the “**MODE**” pedal until the green “**SOUND**” LED illuminates, you can now adjust the sensitivity control on the back of the GB-1 to the correct level. In this mode you can use the “**BLACKOUT**” pedal at any time. To come out of “**BLACKOUT**” mode simply press the “**BLACKOUT**” pedal once more and you will return to “**SOUND**” mode.

Built-in programs:

To activate this mode, press the “**MODE**” foot switch to “**PROG**”, the yellow LED indicator is lit, now use the “**UP**” and “**DOWN**” foot switches to select the desired built-in program. To blackout the unit, press the “**BLACKOUT**” foot switch and press it again to return it to the previous setting.

Full on mode:

To set the Giga Bar into full on mode (white) press and hold for three seconds the “**MODE**” or **BLACKOUT**” pedal, to exit full on mode press the “**MODE**” pedal to select static, sound or prog mode.

IEC power outputs:

To turn on power output socket “**1**” press and hold for three seconds the “**UP**” pedal, to turn off socket “**1**” press and hold the “**UP**” pedal again for three seconds, power output socket “**2**” works in the same way by using the “**DOWN**” pedal. Please note: The output sockets 1 and 2 will not function during “**BLACKOUT**”.

Setting the DMX address:

The DMX mode enables the use of a universal DMX controller. Each fixture requires a “start address” from 1- 512. A fixture requiring one or more channels for control begins to read the data on the channel indicated by the start address. For example, a fixture that occupies or uses 7 channels of DMX and was addressed to start on DMX channel 100, would read data from channels: 100,101,102,103,104,105 and 106. Choose a start address so that the channels used do not overlap. E.g. the next unit in the chain starts at 107.

DMX 512:

DMX (Digital Multiplex) is a universal protocol used as a form of communication between intelligent fixtures and controllers. A DMX controller sends DMX data instructions from the controller to the fixture. DMX data is sent as serial data that travels from fixture to fixture via the DATA “IN” and DATA “OUT” XLR terminals located on all DMX fixtures (most controllers only have a data “out” terminal).

DMX linking:

DMX is a language allowing all makes and models of different manufactures to be linked together and operate from a single controller, as long as all fixtures and the controller are DMX compliant. To ensure proper DMX data transmission, when using several DMX fixtures try to use the shortest cable path possible. The order in which fixtures are connected in a DMX line does not influence the DMX addressing. For example; a fixture assigned to a DMX address of 1 may be placed anywhere in a DMX line, at the beginning, at the end, or anywhere in the middle. When a fixture is assigned a DMX address of 1, the DMX controller knows to send DATA assigned to address 1 to that unit, no matter where it is located in the DMX chain.

DATA cable (DMX cable) requirements (for DMX operation):

This fixture can be controlled via DMX-512 protocol. The DMX address is set on the back of the unit. Your unit and your DMX controller require a standard 3-pin XLR connector for data input/output, see image below.



Further DMX cables can be purchased from all good sound and lighting suppliers or Pro Light Concepts dealers.

Please quote:

CABL10 – 2m


CABL11 – 5m

CABL12 – 10m

Also remember that DMX cable must be daisy chained and cannot be split.

Notice:

Be sure to follow the diagrams below when making your own cables. Do not connect the cables shield conductor to the ground lug or allow the shield conductor to come in contact with the XLRs outer casing. Grounding the shield could cause a short circuit and erratic behaviour.

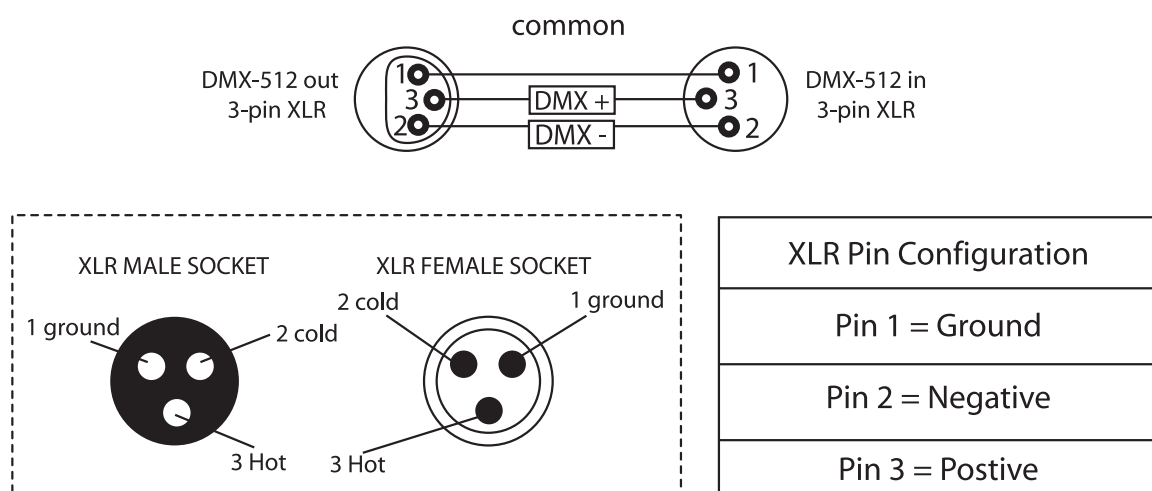


Special note:

Line termination:

When longer runs of cable are used, you may need to use a terminator on the last unit to avoid erratic behaviour.


Using a cable terminator will decrease the possibilities of erratic behaviour.

(3-pin - Order ref: CABL90, 5-pin - Order ref: CABL89)

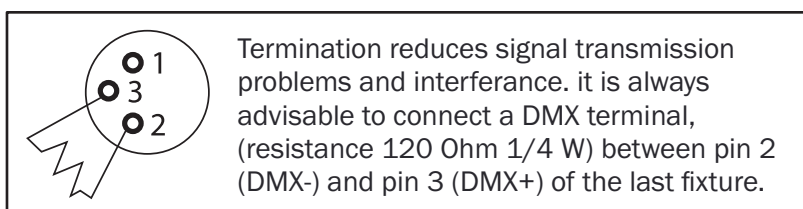

5-pin XLR DMX connectors:

Some manufactures use 5-pin XLR connectors for data transmission in place of 3-pin. 5-pin XLR fixtures may be implemented in a 3-pin XLR DMX line. When inserting standard 5-pin XLR connectors in to a 3-pin line a cable adaptor must be used. The diagram below details the correct cable conversion.

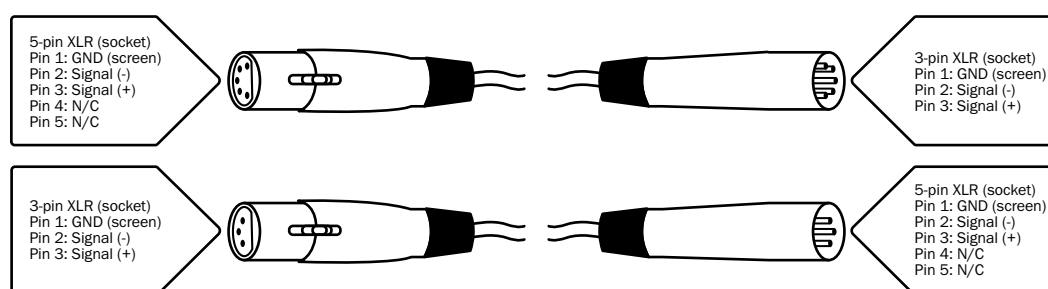



Correct Disposal of this Product (Waste Electrical & Electronic Equipment)

**(Applicable in the European Union and other European countries
with separate collection systems)**

This marking shown on the product or its literature, indicates that it should not be disposed of with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.



EQUINOX