


● ● ● ● ● ● ● ●

ATMOTECH

PROFESSIONAL ATMOSPHERIC EFFECTS

www.prolight.co.uk

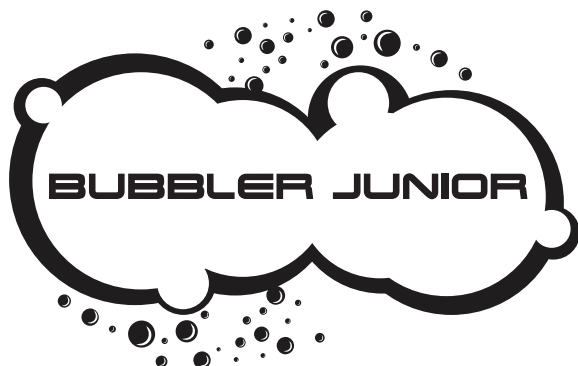

Code: BUBB04

USER MANUAL

● ● ● ● ● ● ● ●

WARNING

**FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY
BEFORE YOUR INITIAL START-UP!**

**CAUTION!**

**Keep this equipment away from rain,
moisture and liquids.**

**SAFETY INSTRUCTIONS**

Every person involved with the installation, operation & maintenance of this equipment should:

- Be competent
- Follow the instructions of this manual



**CAUTION! TAKE CARE USING THIS EQUIPMENT!
HIGH VOLTAGE-RISK OF ELECTRIC SHOCK!!**



Before your initial start-up, please make sure that there is no damage caused during transportation. Should there be any, consult your dealer and do not use the equipment.

To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.

Please note that damages caused by user modifications to this equipment are not subject to warranty.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorised modification to the equipment.

- Never let the power-cable come into contact with other cables. Handle the power-cable and all mains voltage connections with particular caution!
- Never remove warning or informative labels from the equipment.
- Do not open the equipment and do not modify the equipment.
- Only use the equipment indoors.
- Do not expose to flammable sources or gases.
- Always disconnect the power from the mains when equipment is not in use or before cleaning! Only handle the power-cable by the plug. Never pull out the plug by pulling the power-cable.
- Make sure that the available voltage is between 220V/240V.
- Make sure that the power-cable is never crimped or damaged. Check the equipment and the power-cable periodically.
- If the equipment is dropped or damaged, disconnect the mains power supply immediately. Have a qualified engineer inspect the equipment before operating again.
- If the equipment has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation might damage the equipment. Leave the equipment switched off until it has reached room temperature.
- If your product fails to function correctly, discontinue use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Prolight dealer for service.
- Only use fuses of same type and rating.
- Repairs, servicing and power connection must only be carried out by a qualified technician. **THIS UNIT CONTAINS NO USER SERVICEABLE PARTS.**
- **WARRANTY:** One year from date of purchase.

OPERATING DETERMINATIONS

If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void.

Incorrect operation may lead to danger e.g. short-circuit, burns, electric shocks etc.

Do not endanger your own safety and the safety of others!

Incorrect installation or use can cause serious damage to people and property.

Before filling the unit disconnect the mains. Never fill with hot liquids.

Only use high quality, water based bubble fluid recommended by the manufacturer. Other bubble fluids may cause clogging and void the guarantee.


Always make sure there is sufficient bubble fluid in the tank.

Operate the unit only after you have familiarised yourself with its functions, Do not permit operation by persons not qualified for operating the unit and always drain the tank and use the original packaging if the unit is to be transported.

STARTING OPERATION

Install the unit on a level surface. Please make sure that the installation angle does not exceed 5°.

The fluid tank of the unit needs to be filled with bubble fluid before switching on. Please observe the MAX FILL LINE.

Only use quality bubble fluids recommended by your dealer. We recommend high quality bubble fluids. You must not use substances which are classified as 

“DANGEROUS WORKING MATERIALS” or “FLAMMABLE FLUIDS”.

If fluid should get inside the main housing, disconnect the unit from the mains immediately and consult a technician.

INSTALLATION

Install the unit in a well-ventilated area. Use in an insufficiently ventilated room can lead to the condensation of the bubble fluid. The resulting slippery surface can cause accidents. Keep a minimum distance of 20cm around the unit.

Furthermore do not orientate the output directly in the direction of the audience's eyes. In order to create the best effect, there should be a distance between the unit and the audience of at least 1.5m.

Only install the bubble machine on scratch resistant and water resistant surfaces.

This unit is constructed for free standing use only. Do not suspend by the handle or my any other means

Operation:

To start the operation of this bubble machine, first please make sure it is plugged into the mains with the power switch on the rear of the unit switched off. Before switching on the unit please make sure that you have put the correct amount of bubble fluid into the tank.

Note: Please do not over fill the tank with fluid, the “MAX FILL LINE” is clearly stated on the unit.

Please note that if the remote is not connected, the bubble machine will not emit bubbles

When the unit is switched on the green LED on the remote will only light up when the emit button has been pressed.

To emit bubbles using the remote, simply press the red emit button. When you no longer need bubbles press the red emit button again.

CAUTION: Before removing or replacing the remote, please disconnect the mains power supply.


CLEANING AND MAINTENANCE

DANGER TO LIFE!
Disconnect from the mains before
starting maintenance



We recommend a frequent cleaning of the unit. Please use a soft lint-free and moistened cloth. Never use alcohol or solvents!

Clean the output bubble wands frequently from bubble fluid residues.

The  bubble fluids we recommend are non-hazardous to the environment and can be disposed of via the sewage system.

There are no serviceable parts inside this unit except for the fuse. Maintenance and service operations are only to be carried out by authorised dealers.

REPLACING THE FUSE

Only replace the fuse with a fuse of same type and rating.

Before replacing the fuse, disconnect from the mains.

Procedure:

- Step 1: Open the fuse holder on the rear panel with a suitable screwdriver.**
- Step 2: Remove the old fuse from the fuse holder,**
- Step 3: Install the new fuse in the fuse holder**
- Step 4: Replace the fuse holder in the housing.**


Should you need any spare parts, only use genuine parts.

Should you have any further questions, please contact your dealer.

Overview:

Identification: >>

1. Carry handle
2. Cooling fan
3. On/off power switch
4. Remote socket
5. IEC power in socket
6. Earthing screw

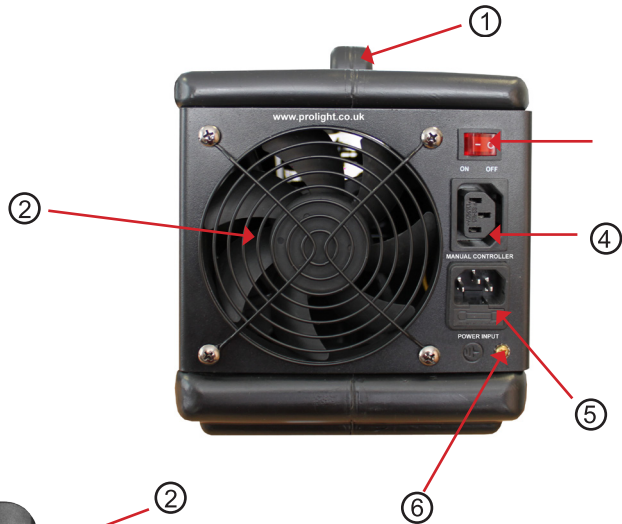

<< Identification:

1. Remote cable
2. Output LEDs
3. Remote control
4. Bubble emit button

Cautions:

- Do not overfill your bubble machine as overfilling will cause the unit to leak.
- Keep the unit dry.
- Keep the unit upright.
- This machine is not water proof or splash proof. If any moisture, water or any liquid gets inside the housing. Immediately unplug the unit and contact a service technician or your dealer before using it again.
- For operation by adults only. The bubble machine must be installed out of the reach of children.
- Never leave the unit running unattended.
- Never aim the output towards open flames.
- Extended use will make all surfaces slippery.
- Position the output of the bubbles away from people.
- Always switch the unit off at the mains when refilling or cleaning the system.
- Regular cleaning of the bubble wheel is required.
- Do not transport with liquid inside. If the machine gets wet, do not use it again until it has dried.
- Bubble liquid may leave permanent marks on some types of clothing.

Features:

- High output
- High velocity fan
- One "Double Wand"
- Remote control
- Easy refills
- Large fluid reservoir
- Fluid recycling
- Tank Capacity: 1.2 litres
- Fluid Consumption Rate: 1 litre per 2 hours
- Power consumption: 30W
- Power supply: 240V~60Hz
- Dimensions: 355 x 178 x 210mm
- Weight: 1.3Kgs

English



***Correct Disposal of This Product
(Waste Electrical & Electronic Equipment)***

(Applicable in the European Union and other European countries with separate collection systems)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

ATMOTECH

PROFESSIONAL ATMOSPHERIC EFFECTS

www.prolight.co.uk