



Professional  
Loudspeaker

# Concept 200

## Key Features:

- 10"/65mm Transducer
- 1.35" Voice Coil, 1" Exit Titanium Compression Driver
- 90°×80° Coverage Pattern
- Smooth Response With High Power Handling Capacity ( Continuous Program/RMS), 250W/1000W
- 12 Integral Suspension Points
- Complete Mounting Solutions



## General Description and Applications:

The Concept Series offers a truly professional sound to musicians and DJs working small to medium venues.

The full range 2-way system can function either as a main PA or as monitors and can be mounted on stands. These portable, full range speakers can be optimized for use with the **W audio** subwoofer, which also serves as a pole mount base.

Additionally, any **W audio** subwoofer will complement the Concept Series. The full range models include threaded mounting points for installation applications.

## Technical Specification:

Freq.Range(-10dB):	60Hz~20kHz
Freq.Response(-3dB):	80Hz~20kHz
Rec.Hipass Frequency:	50Hz
Axial Sensitivity:	95dB(1W/1m)
Max Calculated SPL:	125dB
Horizontal Coverage:	90°
Vertical Coverage:	80°
Rated System Power:	250W Continuous 1000W Peak
LF Transducer:	10"/65mm
HF Transducer:	1"/34mm
Crossover Frequency:	2.5kHz
Nominal Impedance:	8 Ohms
Connector:	2×NL4 Speakon
Dim (W×H×D):	300mm×485mm×321mm
Net Weight:	16Kg
Shipping Weight:	18Kg




# Concept 200




Professional  
Loudspeaker

## Frequency Response

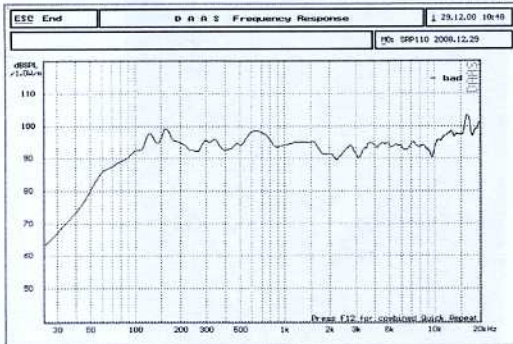

## Block Diagram

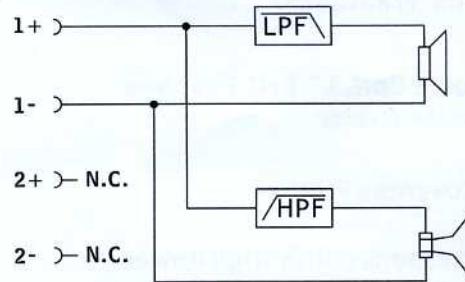

## Dimension Drawings

