




WWW.PROLIGHT.CO.UK

Xterior 150W Tri Flood

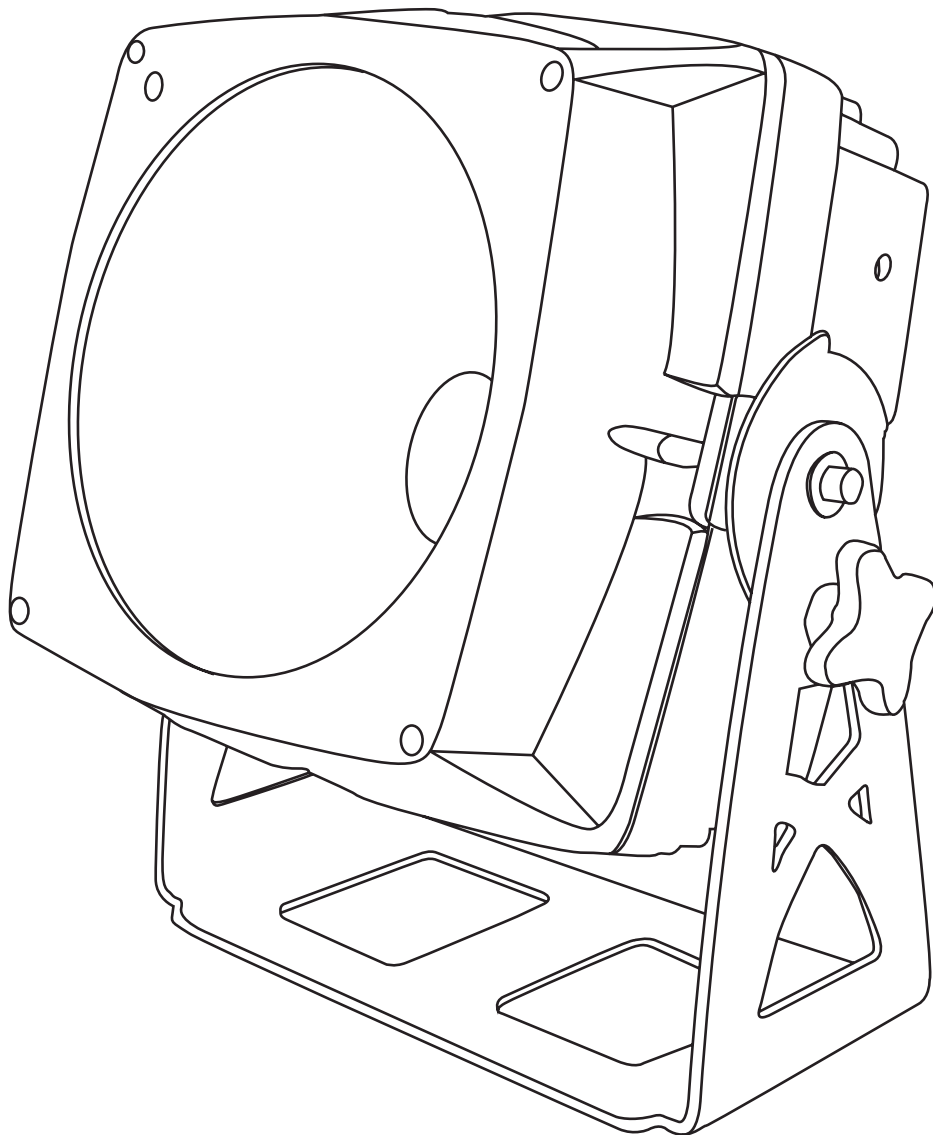

Order code: LEDJ156

USER MANUAL

WARNING

**FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY
BEFORE YOUR INITIAL START-UP!**

**CAUTION!**

INPUT VOLTAGE OF 110~240V

**SAFETY INSTRUCTIONS**

Every person involved with the installation, operation & maintenance of this equipment should:

- Be competent
- Follow the instructions of this manual



**CAUTION! TAKE CARE USING THIS EQUIPMENT!
HIGH VOLTAGE-RISK OF ELECTRIC SHOCK!!**



Before your initial start-up, please make sure that there is no damage caused during transportation. Should there be any, consult your dealer and do not use the equipment.

To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.

Please note that damages caused by user modifications to this equipment are not subject to warranty.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorised modification to the equipment.

- Never let the power-cable come into contact with other cables. Handle the power-cable and all mains voltage connections with particular caution!
- Never remove warning or informative labels from the equipment.
- Do not open the equipment and do not modify the equipment.
- Do not connect this equipment to a dimmer-pack.
- Do not switch the equipment on and off in short intervals, as this will reduce the system's life.
- Do not expose to flammable sources or gases.
- Always disconnect the power from the mains when equipment is not in use or before cleaning! Only handle the power-cable by the plug. Never pull out the plug by pulling the power-cable.
- Make sure that the available voltage is between 220v/240v.
- Make sure that the power-cable is never crimped or damaged. Check the equipment and the power-cable periodically.
- If the equipment is dropped or damaged, disconnect the mains power supply immediately. Have a qualified engineer inspect the equipment before operating again.
- If your product fails to function correctly, discontinue use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Prolight dealer for service.
- Only use fuses of same type and rating.
- Repairs, servicing and power connection must only be carried out by a qualified technician. THIS UNIT CONTAINS NO USER SERVICEABLE PARTS.
- WARRANTY; One year from date of purchase.

OPERATING DETERMINATIONS

If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void.

Incorrect operation may lead to danger e.g.: short-circuit, burns, electric shocks, lamp failure etc.

Do not endanger your own safety and the safety of others!
Incorrect installation or use can cause serious damage to people and property.

Introduction


Xterior 150W Tri Flood

- 150W tri-colour LED
- Beam angle: 60 degrees
- 400Hz refresh rate
- 0-100% dimming and variable strobe
- DMX channels: 3/5 or 6 selectable
- Static colour, colour fade, colour change, master/slave and DMX modes
- Optional I.R remote (LEDJ90B)
- 4 push button menu with LCD display
- IP rated power in/out sockets
- IP rated 3-pin DMX in/out sockets
- Power consumption: 186W
- Power supply: 100-240V~50/60Hz
- IP rating: IP-65
- Dimensions: 320 x 180 x 325mm
- Weight: 8.6Kgs

Overview

Identification:

- 1, Tightening Knobs
- 2, Bracket
- 3, Power in
- 4, DMX in
- 5, DMX out
- 6, Power out
- 7, Mode button
- 8, Enter button
- 9, Up button
- 10, Down button
- 11, LCD display

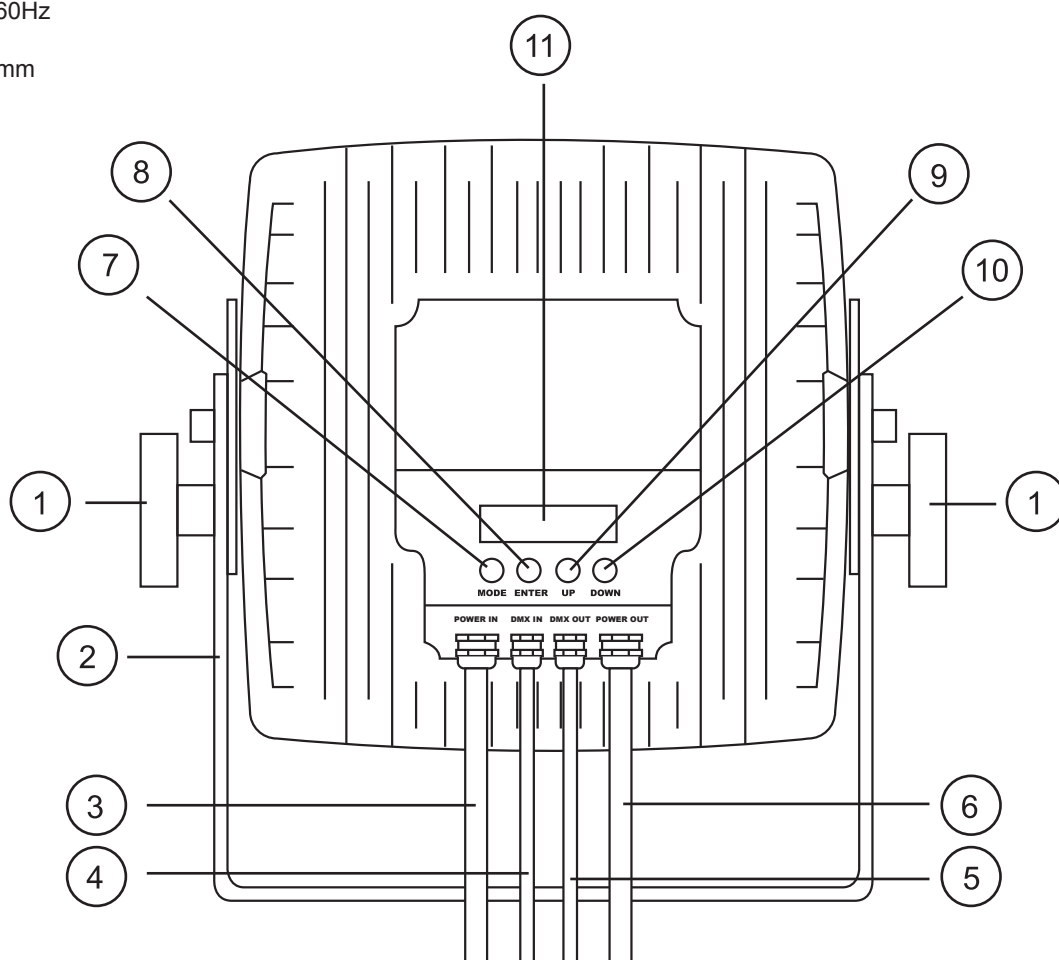

Setup

Operating Instructions

The Xterior 150W Tri Flood is a DMX-512 controllable unit using a high efficiency COB LED and will operate in stand alone, master/slave or DMX control modes.

Xterior 150W Tri Flood Operation modes

Built-in programmes:

To activate the units built-in programmes, press the **“MODE”** button to show **“01.STATIC”** on the LCD screen. Press the **“ENTER”** button to choose between the 4 built-in programmes by using the **“UP”** and **“DOWN”** buttons. Now press the **“ENTER”** button to select the desired speed and adjust by using the **“UP”** and **“DOWN”** buttons. Press the **“ENTER”** button once more to select the desired flash value and adjust by using the **“UP”** and **“DOWN”** buttons.

Speed values: 00 - 99 (00 = slow, 99 = fast)

Flash values: 00 - 99 (00 = slow, 99 = fast)

Programme 1 - Static colour

In this mode you can set the Xterior 150W Tri to any colour and any brightness.

When you are in the **“01.STATIC”** mode, press the **“enter”** button to change the brightness of each individual colour.

The **“R”** represents Red, **“G”** = Green, **“B”** = Blue and **“F”** = strobe.

The two digits after it are the brightness 00 to 99 or in **“CF”** they are the strobe speed.

Example: If you set R, G, and B all to zero, the 150W Tri will have no LEDs showing (blackout). If you set R to 99 and G, and B to zero the 150W Tri will be 100% Red.

Programme 2 - 7 colour change

In this mode the Xterior 150W Tri will run through its 7 preset colours.

Programme 3 - 3 colour change

In this mode the Xterior 150W Tri will run through its 3 colours.

Programme 4 - colour fade

In this mode the Xterior 150W Tri will fade through its 7 preset colours.

DMX mode:

To activate the unit in DMX mode, press the **“MODE”** button to show **“DMX MODE”** on the LCD screen. Press the **“ENTER”** button and select the desired DMX address setting by using the **“UP”** and **“DOWN”** buttons. Then to select one of the 3 DMX modes 3/5 or 6 channel, press the **“ENTER”** button again to choose the desired DMX mode by using the **“UP”** and **“DOWN”** buttons.

For the 3/5 or 6 channel DMX address information please see page 5

Slave mode:

To activate the unit in slave mode, first you must link multiple units together and press the **“MODE”** button to show **“SLAVE MODE”** on the LCD screen. Now on the master unit press the **“MODE”** button to select the desired mode and the slave units will now run in sequence with the master unit.

NOTE: The unit has a password and locks after being unused for several minutes, to unlock the unit again press the buttons in the following order, **“UP”**, **“DOWN”**, **“UP”**, **“DOWN”** followed by **“ENTER”**.

Xterior 150W Tri DMX Charts**3 channel mode DMX chart**

Channel	Value	Function
1	0-255	Red 0-100%
2	0-255	Green 0-100%
3	0-255	Blue 0-100%

5 channel mode DMX chart

Channel	Value	Function
1	0-255	Red
2	0-255	Green
3	0-255	Blue
4	0-255	Master dimmer 0-100%
5	0	On
	1-5	Off
	6-10	On
	11-255	Strobe (slow to fast)

6 channel mode DMX chart

Channel	Value	Function
1	0-255	Master dimmer 0-100%
2	0-255	Strobe (slow to fast)
3	0-255	Red
4	0-255	Green
5	0-255	Blue
6	0-4	On
	5-125	Colour change (slow to fast)
	126-255	Colour fade (slow to fast)

DMX Linking:

• DMX is a language allowing all makes and models of different manufactures to be linked together and operate from a single controller, as long as all fixtures and the controller are DMX compliant. To ensure proper DMX data transmission, when using several DMX fixtures try to use the shortest cable path possible. The order in which fixtures are connected in a DMX line does not influence the DMX addressing. For example; a fixture assigned to a DMX address of 1 may be placed anywhere in a DMX line, at the beginning, at the end, or anywhere in the middle. When a fixture is assigned a DMX address of 1, the DMX controller knows to send DATA assigned to address 1 to that unit, no matter where it is located in the DMX chain.

DATA Cable (DMX cable) requirements (for DMX operation):

• The Xterior 150W Tri can be controlled via DMX-512 protocol. The DMX address is set on the back of the unit. Your unit requires a IP rated connector for data input/output.

Notice:

• Be sure to follow figures 2 & 3 when making your own cables. Do not connect the cable's shield conductor to the ground lug or allow the shield conductor to come in contact with the XLR's outer casing. Grounding the shield could cause a short circuit and erratic behaviour.



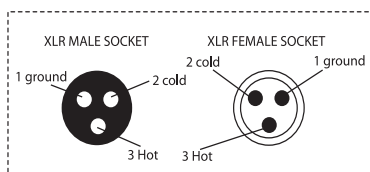


fig 2.

XLR Pin Configuration
Pin 1 = Ground
Pin 2 = Negative
Pin 3 = Postive

fig 3.



Termination reduces signal transmission problems and interference. it is always advisable to connect a DMX terminal, (resistance 120 Ohm 1/4 W) between pin 2 (DMX-) and pin 3 (DMX+) of the last fixture.

fig 4.


Special Note: Line termination:

• When longer runs of cable are used, you may need to use a terminator on the last unit to avoid erratic behaviour (fig 4).

Using a cable terminator (part number LEDJ260) will decrease the possibilities of erratic behaviour.

5-Pin XLR DMX Connectors:

• Some manufactures use 5-pin XLR connectors for data transmission in place of 3-pin. 5-Pin XLR fixtures may be implemented in a 3-pin XLR DMX line. When inserting standard 5-pin XLR connectors in to a 3-pin line a cable adaptor must be used. The chart below details the correct cable conversion.

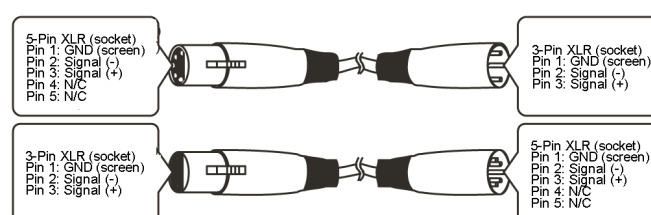



WWW.PROLIGHT.CO.UK